

CALIENTE HORIZONTAL

Designer Series

50 Δt

(75/65/20°C)

SINGLE TUBE

DOUBLE TUBE

Height mm	Length mm	Elements	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
594	800	18	405911800	626	2136	405922800	968	3306
	1000	18	405911100	788	2668	405922100	1211	4132
	1200	18	405911120	938	3200	-	-	-
	1400	18	405911140	1095	3736	-	-	-

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CALIENTE HORIZONTAL

Designer Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

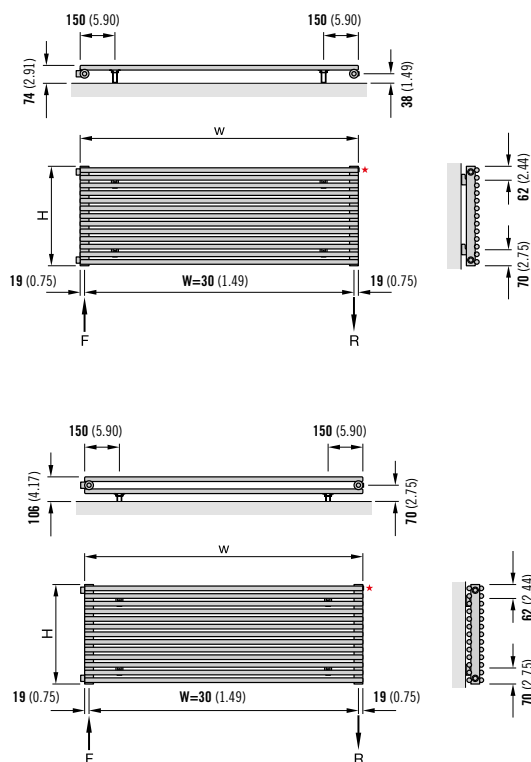

PRODUCT SPECIFICATION

Tube diameter = Ø20mm and Ø38mm
Steel thickness = 1.25mm for Ø20 ; 1.4mm for Ø38
Working pressure = 6 bar
Operating temp = 110° max

★ Air vents

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Single	Double
Height	594	594
W/m at 75/65/20	782	1210
n-coefficients	1.25	1.26
Heated surface area (m²/m)	1.13	2.26
Weight (kg/m)	12.2	22.6
Water contents (l/m)	5.49	12.47
Wall to tap centre (mm)	38	70