

50 Δt

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407501450	389	1327	£256.47	£307.76
	500	407501500	431	1471	£262.15	£314.58
	600	407501600	517	1764	£273.49	£328.19
	750	407501750	645	2201	£294.77	£353.72
1199	450	401101450	615	2098	£296.37	£355.64
	500	401101500	675	2303	£304.63	£365.56
	600	401101600	794	2709	£320.95	£385.14
	750	401101750	972	3316	£350.41	£420.49
1791	450	401701450	900	3071	£349.16	£418.99
	500	401701500	986	3364	£361.09	£433.31
	600	401701600	1158	3951	£391.91	£470.29
	750	401701750	1416	4831	£433.70	£520.44
2013	450	402001450	1002	3419	£369.95	£443.94
	500	402001500	1099	3750	£390.47	£468.56
	600	402001600	1294	4415	£417.56	£501.07
	750	402001750	1586	5411	£464.45	£557.34

STRAIGHT DOUBLE


Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407502450	552	1883	£325.16	£390.19
	500	407502500	616	2102	£335.02	£402.02
	600	407502600	748	2552	£355.04	£426.05
	750	407502750	947	3231	£389.69	£467.63
1199	450	401102450	868	2962	£392.62	£471.14
	500	401102500	963	3286	£416.70	£500.04
	600	401102600	1154	3937	£446.92	£536.30
	750	401102750	1441	4917	£497.57	£597.08
1791	450	401702450	1268	4326	£490.30	£588.36
	500	401702500	1402	4784	£513.77	£616.52
	600	401702600	1670	5698	£557.47	£668.96
	750	401702750	2073	7073	£653.97	£784.76
2013	450	402002450	1427	4869	£527.74	£633.29
	500	402002500	1576	5377	£553.98	£664.78
	600	402002600	1874	6394	£627.64	£753.17
	750	402002750	2321	7919	£708.18	£849.82

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




SINGLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

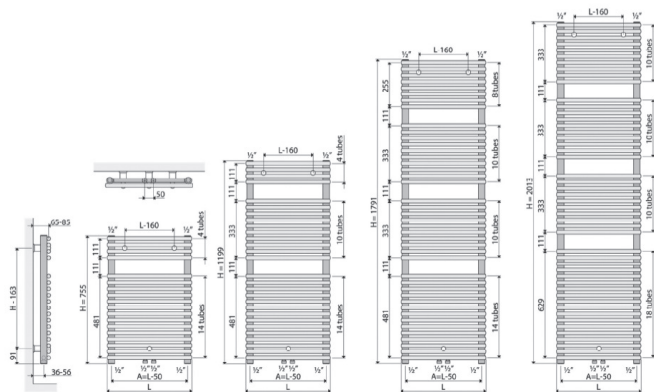

DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

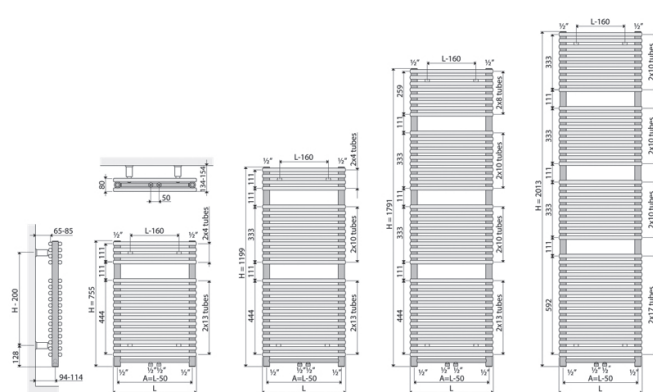


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS

Single and Double.

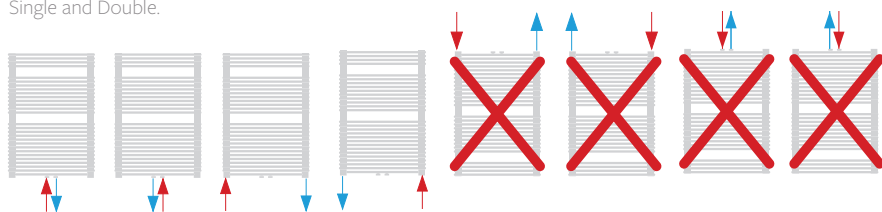

Piping options: BBOE (Bottom, Bottom, Opposite, End)

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	SINGLE															
Tube Quantity	18	18	18	18	28	28	28	28	42	42	42	42	48	48	48	48
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	389	431	517	645	615	675	794	972	900	986	1158	1416	1002	1099	1294	1586
n-coefficients	1.18	1.17	1.15	1.13	1.21	1.20	1.19	1.17	1.24	1.23	1.21	1.17	1.26	1.24	1.21	1.17
Heated surface area (m²/m)	0.75	0.82	0.94	1.13	1.18	1.28	1.47	1.76	1.77	1.91	2.20	2.64	2.01	2.18	2.51	3.01
Weight (kg/m)	6.80	7.40	8.50	10.20	10.90	11.80	13.50	16.10	17.30	18.60	21.30	25.20	18.90	20.40	23.40	27.80
Water contents (l/m)	3.70	4.00	4.50	5.30	5.90	6.30	7.10	8.30	9.10	9.70	11.00	12.90	10.00	10.70	12.00	14.10

Type	DOUBLE															
Tube Quantity	2x17	2x17	2x17	2x17	2x27	2x27	2x27	2x27	2x41	2x41	2x41	2x41	2x47	2x47	2x47	2x47
Height	755	755	755	755	1199	1199	1199	1199	1791	1791	1791	1791	2013	2013	2013	2013
Length	450	500	600	750	450	500	600	750	450	500	600	750	450	500	600	750
W/m at 75/65/20	565	626	749	934	868	963	1154	1441	1269	1402	1670	2073	1427	1576	1874	2321
n-coefficients	1.21	1.21	1.20	1.19	1.23	1.23	1.22	1.21	1.25	1.24	1.23	1.20	1.25	1.24	1.23	1.21
Heated surface area (m²/m)	1.33	1.45	1.70	2.07	2.07	2.26	2.65	3.23	3.10	3.39	3.97	4.85	3.54	3.87	4.53	5.53
Weight (kg/m)	12.47	13.59	15.82	19.17	19.40	21.14	24.61	29.82	29.15	31.75	36.94	44.72	33.20	36.14	42.01	50.82
Water contents (l/m)	6.62	7.19	8.32	10.02	10.30	11.18	12.95	15.59	15.32	16.62	19.23	23.13	17.60	19.11	22.13	26.65
Km	4.91	5.54	6.86	9.00	6.97	7.87	9.77	12.84	9.54	10.84	13.64	18.38	10.66	12.10	15.21	20.48

COLOUR GUIDE

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Natural Colours



NT110
Papyrus white



NT120
Pearl white



NT130
Champagne



NT140
Beige



NT150
Beige grey



NT160
Pebble grey



NT170
Quartz grey



SN110
Cream white



SN120
Cream



SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours



ML110
Dove grey



ML120
Titanium grey



ML130
Blue grey



ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours



A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue



A6018
Yellow green



A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey




A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white




A9005
Jet black



RAL 9016*
Traffic white

FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM



RAL 9016*
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com